



# Analysis of the Stability and Solitary Waves for the Car-Following Model on Two Lanes

Wenhuan Ai, Tao Xing, Yuhang Su, Dawei Liu, Huifang Ma

## ► To cite this version:

Wenhuan Ai, Tao Xing, Yuhang Su, Dawei Liu, Huifang Ma. Analysis of the Stability and Solitary Waves for the Car-Following Model on Two Lanes. 11th International Conference on Intelligent Information Processing (IIP), Jul 2020, Hangzhou, China. pp.244-253, 10.1007/978-3-030-46931-3\_23. hal-03456982

**HAL Id: hal-03456982**

**<https://inria.hal.science/hal-03456982>**

Submitted on 30 Nov 2021

**HAL** is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.



Distributed under a Creative Commons Attribution 4.0 International License

# Analysis of the stability and solitary waves for the car-following model on two lanes

WenHuan Ai<sup>1,\*</sup>, Tao Xing<sup>1</sup>, YuHang Su<sup>1</sup>, DaWei Liu<sup>2</sup>, HuiFang Ma<sup>1</sup>

<sup>1</sup>College of Computer Science & Engineering, Northwest Normal University, Lanzhou, Gansu, 730070, China

WenHuan Ai: wenhuan618@163.com, YuHang Su: 463753759@qq.com,  
Tao Xing: 573340970@qq.com, HuiFang Ma: 452770064@qq.com

<sup>2</sup>College of Electrical Engineering, Lanzhou Institute of Technology, Lanzhou, Gansu, 730050, China

liudawei20120901@163.com

**Abstract.** In this paper, Analysis of the stability and solitary waves for a car-following model on two lanes is carried out. The stability condition of the model is obtained by using the linear stability theory. We study the nonlinear characteristics of the model and obtain the solutions of Burgers equation, KDV equation, and MKDV equation, which can be used to describe density waves in three regions (i.e., stable, metastable and unstable), respectively. The analytical results show that traffic flow can be stabilized further by incorporating the effects come from the leading car of the nearest car on neighbor lane into car-following model.

**Keywords:** Car-following Model on Two Lanes, Traffic Flow, Density Waves.

## 1 Introduction

Car-following theory is one of the most important part of modern traffic theory. Since 1953 when Pipes[1] presented the first model, an increasing number of models have been proposed [2-9]. In 2002, Jiang et al[6] presented a car-following model called full velocity difference model (FVDM). FVDM revealed the complex dynamic characteristics of traffic flow, therefore, various developed models based FVDM were proposed.

With the development of transportation, study on two-lane traffic has been increasingly necessary. However, early car-following models like FVDM are only subject to single lane traffic, thence, many scholars have made a lot of research on two-lane traffic and proposed a series of new models, which mainly divided into lattice model

---

Correspondence should be addressed to WenHuan Ai ;College of Computer Science & Engineering, Northwest Normal University, Lanzhou, Gansu, 730070, China ;wenhuan618@163.com

and car-following model. Nagatani[10] proposed lattice model on two lane traffic in 1998. Peng [11-14] extended the two-lane lattice model, and presented a series of new models based lattice model of Nagatani. Tang et al [15] presented a car-following model on two lanes by considering the lateral effects in traffic. They found that vehicle drivers always worry about the lane changing actions from neighbor lane and the consideration of lateral effects could stabilize the traffic flows on both lanes.

A large of traffic accidents are caused by unreasonable lane changing. In order to avoid such accidents, drivers have to worry about the lane changing actions not only of the nearest car in neighbor lane but also of the preceding car of the nearest car on neighbor lane. In this paper, we propose an extended car-following model on two lanes though considering the effects from both the nearest car and its leading car in neighbor lane which is rarely studied by others. Then the stability condition of the new model is derived by using the stability theory. Next, we obtain the solutions of Burgers equation, KDV equation and MKDV equation, which can be used to describe density waves in three regions (i.e., stable, metastable and unstable) respectively. The analytical results show that traffic flow can be stabilized further by incorporating the effects come from the leading car of the nearest car on neighbor lane into car-following model.

## 2 Model

In case of two-lane traffic, it is necessary to consider the lateral effects. This is because plenty of surveys show that most drivers have to be ready to take precautions against the near vehicle on neighbor lane due to the suddenly lane changing without any alert message. The ‘near vehicle’ on neighbor lane is composed of the nearest vehicle and its leading car on neighbor lane. In general, the distance between one car and its nearest car on neighbor lane is so small that drivers always judge the lane changing action of his/her nearest-lateral car by observing the distance between his/her leading car and the nearest-lateral car. Hence, the dynamic equation of the car-following model on two lanes is as follows [15]:

$$\frac{d^2 x_{l,n}(t)}{dt^2} = f_{sti} \left( v_{l,n}(t), \Delta x_{l,n}(t), \sum_l \Delta_{l,n}, \Delta v_{l,n}(t) \right) \quad (1)$$

Where  $l=0,1$  represent the lane number,  $\Delta_{l,n}$  is the distance between the  $n_l$  vehicle on lane  $l$  and the leading car of its nearest vehicle on neighbor lane.

In this paper, Eq.(1) can be rewritten as:

$$\frac{dx_{l,n}^2(t)}{dt^2} = a_l \left[ V_l \left( \Delta x_{l,n}(t), \sum_l \Delta_{l,n} \right) - \frac{dx_{l,n}(t)}{dt} \right] + \lambda_l \Delta v_{l,n}(t) \quad (2)$$

$V_l \left( \Delta x_{l,n}(t), \sum_l \Delta_{l,n} \right)$  is the optimal velocity formulated as

$$V_l \left( \Delta x_{l,n}(t), \sum_l \Delta_{l,n} \right) = V_l \left( \overline{\Delta x_{l,n}} \right) = V_l \left( \alpha_l \Delta x_{l,n} + \beta_{1l} \Delta_{l,n} + \beta_{2l} \Delta_{1-l,n} \right) \quad (3)$$

where  $\alpha_l, \beta_{1l}, \beta_{2l}$  are the weights of axial headway  $\Delta x_{l,n}(t)$  and lateral distance  $\sum_l \Delta_{l,n}$  respectively.

$$\alpha_l + \beta_{1l} + \beta_{2l} = 1$$

According to the optimal velocity function presented by Bando [2], the optimal velocity function on two lanes is given by

$$V_l \left( \overline{\Delta x_{l,n}} \right) = \frac{v_{l,\max}}{2} \left[ \tanh \left( \overline{\Delta x_{l,n}} - h_{lc} \right) + \tanh \left( h_{lc} \right) \right] \quad (4)$$

This velocity function has a turning point at  $\overline{\Delta x_{l,n}} = h_{lc}$

$$V_l' \left( \overline{\Delta x_{l,n}} \right) = \frac{d^2 V_l \left( \overline{\Delta x_{l,n}} \right)}{d \overline{\Delta x_{l,n}}^2} \Big|_{\overline{\Delta x_{l,n}} = h_{lc}} = 0 \quad (5)$$

### 3 Linear stability analysis

We apply the linear stability theory to examine the car-following model on two lanes described by Eq.(2). The uniform traffic flow is defined by such a state that all vehicles on lane  $l$  move with the optimal velocity  $V_l \left( \Delta x_{l,n}(t), \sum_l \Delta_{l,n} \right)$  and the identical headway  $h_l$  and the lateral distance  $\sum_l \Delta_l$ ; the relative velocity  $\Delta v_{l,n}(t)$  is zero. The solution  $x_{l,n}^{(0)}(t)$  is given by

$$x_{l,n}^{(0)}(t) = h_l n_l + V_l \left( h_l, \sum_l \Delta_l \right) t \quad (6)$$

Assuming  $y_{l,n}(t)$  be a small deviation from the steady state  $x_{l,n}^{(0)}(t)$ , we have

$$x_{l,n}(t) = x_{l,n}^{(0)}(t) + y_{l,n}(t) \quad (7)$$

Substituting the Eq. (6) and Eq. (7) into Eq. (2), we rewrite linearized equation as

$$\frac{dy_{l,n}^2(t)}{dt^2} = a_l \left[ V_l'(h_l) \left( \alpha_l \Delta y_{l,n}(t) + \beta_{1l} \Delta_{l,n} + \beta_{2l} \Delta_{1-l,n} \right) - \frac{dy_{l,n}(t)}{dt} \right] + \lambda_l \frac{d \Delta y_{l,n}(t)}{dt} \quad (8)$$

Where  $V_l' \left( \overline{\Delta x_{l,n}} \right) = dV_l \left( \overline{\Delta x_{l,n}} \right) / d \overline{\Delta x_{l,n}}$ , at  $\overline{\Delta x_{l,n}} = h_l$ , and  $\Delta y_{l,n}(t) = y_{l,n+1}(t) - y_{l,n}(t)$ . For a very small perturbation  $y_{l,n}(t)$  at  $x_{l,n}^{(0)}(t)$ , we can let  $\Delta_{l,n} = \Delta_{1-l,n} \equiv \Delta y_{l,n+1}$ .

Expanding  $y_{l,n}(t)$  in the Fourier-modes,  $y_{l,n}(t) \approx A_l e^{(ik_l n_t + z_l t)}$ , we obtain

$$z_l^2 = a_l \left[ V_l'(h_l) \times (\alpha_l (e^{ik_l} - 1) + (\beta_{1l} + \beta_{2l}) (e^{ik_l} - 1) e^{ik_l}) - z_l \right] + \lambda_l z_l (e^{ik_l} - 1) \quad (9)$$

Substituting  $z_l = z_{1l}(ik_l) + z_{2l}(ik_l)^2 + \dots$  into Eq. (9), we obtain the first- and second-order terms of coefficients in the expression of  $z_l$  as follows:


$$z_{1l} = (\alpha_l + \beta_{1l} + \beta_{2l}) V_l'(h_l) = V_l'(h_l)$$

$$z_{2l} = \frac{a_l V_l'(h_l) [\alpha_l + 3(\beta_{1l} + \beta_{2l})] + 2\lambda_l z_{1l} - 2z_{1l}^2}{2a_l}$$

For small disturbances with long wavelengths, the uniform steady state will become unstable when  $z_{2l}$  is negative. Thus the neutral stability curve is given by

$$a_{ls} = \frac{V_l'(h_l) - \lambda_l}{0.5\alpha_l + 1.5(\beta_{1l} + \beta_{2l})} \quad (10)$$

The uniform traffic flow will be unstable if  $a_l < a_{ls}$

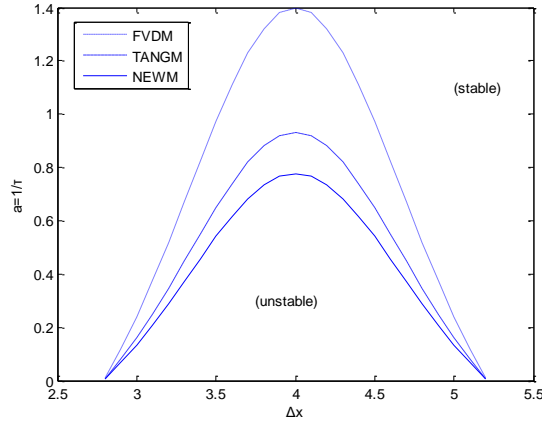

**Fig. 1.** Phase diagram in the headway-sensitivity space. The parameters related to the models are given in Table 1

The neutral stability curves in parameter space are shown in Fig.1, where the sensitivity  $\alpha_l = 1/\tau_l$ . From Fig.1 it can be seen that the stable region of both the new model and Tang model are larger than stable region of the FVDM. It means the uniform traffic flow has been stabilized with taking into account the lateral effects. Furthermore, relative to Tang model, the critical point and neutral stability curve of new model are lower, which shows that the uniform traffic flow has been further strengthened by adjusting the lateral effects from both nearest car and its leader car in neighbor lane. The traffic jam is thus relieved efficiently.

**Table 1.** parameters related to the models

	$\alpha_l$	$\beta_{1l}$	$\beta_{2l}$	$\lambda_l$
FVDM	1	0	0	0.2
TANGM	0.75	0.25	0	0.2
NEWM	0.6	0.25	0.15	0.2

#### 4 Nonlinear analysis

To facilitate the study of the density wave problem in the following three regions below, we rewrite Eq. (2) as follows:

$$\begin{aligned} \frac{d^2 \Delta x_{l,n}(t)}{dt^2} = & a_l \left\{ V_l \left( \Delta x_{l,n+1}(t), \sum_l \Delta_{l,n+1} \right) - V_l \left( \Delta x_{l,n}(t), \sum_l \Delta_{l,n} \right) - \frac{d \Delta x_{l,n}(t)}{dt} \right\} \\ & + \lambda_l \left( \frac{d \Delta x_{l,n+1}(t)}{dt} - \frac{d \Delta x_{l,n}(t)}{dt} \right) \end{aligned} \quad (11)$$

Where  $V_l \left( \Delta x_{l,n+1}(t), \sum_l \Delta_{l,n+1} \right) = V_l(\overline{\Delta x_{l,n}})$ ,  $\overline{\Delta x_{l,n}} = \alpha_l \Delta x_{l,n} + \beta_{1l} \Delta_{l,n} + \beta_{2l} \Delta_{l-l,n}$

##### 4.1 Burger equation

We now consider the slowly varying behaviors for long waves in the three regions (i.e. stable, metastable and unstable). Introduce slow scales for space variable  $n_l$  and time variable  $t$ . For  $0 < \varepsilon \leq 1$ , we define the slow variable  $X_l$  and  $T$

$$X_l = \varepsilon(n_l + b_l t), T = \varepsilon^2 t \quad (12)$$

Where  $b_l$  is a constant to be determined. Let

$$\Delta x_{l,n} = h_l + \varepsilon R_l(X_l, T) \quad (13)$$

Substituting Eq. (12) and Eq.(13) into Eq.(11) and expanding to the third order of  $\varepsilon$ , we obtain the following nonlinear partial differential equation

$$\begin{aligned} \varepsilon^2 a_l (b_l - V'(h_l)) \partial_{X_l} R_l + \varepsilon^3 \{ a_l \partial_T R_l - a_l V''(h_l) R_l \partial_{X_l} R_l \\ - \left( \frac{a_l}{2} [\alpha_l + 3(\beta_{1l} + \beta_{2l})] V'(h_l) - b_l^2 + \lambda_l b_l \right) \partial_{X_l}^2 R_l \} = 0 \end{aligned} \quad (14)$$

Where  $V'_l(h_l) = \frac{dV(\overline{\Delta x_{l,n}})}{d\overline{\Delta x_{l,n}}} \Big|_{\overline{\Delta x_{l,n}}=h_l}$ ,  $V''_l(h_l) = \frac{d^2 V(\overline{\Delta x_{l,n}})}{d\overline{\Delta x_{l,n}}^2} \Big|_{\overline{\Delta x_{l,n}}=h_l}$ ,  $\partial_T = \frac{\partial}{\partial T}$ ,  $\partial_{X_l} = \frac{\partial}{\partial X_l}$

By taking  $b_l = V'(h_l)$ , we eliminate the second-order term of  $\varepsilon$  from Eq. (14) and have

$$\begin{aligned}\partial_T R_l - V'(h_l) R_l \partial_{X_l} R_l &= \left( \frac{1}{2} [\alpha_l + 3(\beta_{1l} + \beta_{2l})] V'(h_l) - \frac{b_l^2}{a_l} + \frac{\lambda_l b_l}{a_l} \right) \partial_{X_l}^2 R_l \\ &= \left( \frac{1}{2} [\alpha_l + 3(\beta_{1l} + \beta_{2l})] - \frac{V'(h_l)}{a_l} + \frac{\lambda_l}{a_l} \right) V'(h_l) \partial_{X_l}^2 R_l\end{aligned}\quad (15)$$

The coefficient  $\frac{1}{2} [\alpha_l + 3(\beta_{1l} + \beta_{2l})] - \frac{V'(h_l)}{a_l} + \frac{\lambda_l}{a_l} > 0$  in the stable region satisfies the stability criterion. Thus, in the stable region Eq.(15) is the Burgers equation. The solution of the Burgers equation is as follow:

$$\begin{aligned}R(X_l, T) &= \frac{1}{|V'(h_l)|T} \left[ X - \frac{\eta_{n+1} - \eta_n}{2} \right] - \frac{\eta_{n+1} - \eta_n}{2|V'(h_l)|T} \\ &\times \tanh \left[ \left( \frac{1}{2} [\alpha_l + 3(\beta_{1l} + \beta_{2l})] - \frac{V'(h_l)}{a_l} + \frac{\lambda_l}{a_l} \right) \times V'(h_l) \frac{(\eta_{n+1} - \eta_n)(X_l - \xi_n)}{4|V'(h_l)|T} \right]\end{aligned}\quad (16)$$

Where  $\eta_n$  are the coordinates of the intersections of the slopes with the x-axis and  $\xi_n$  are those of the shock fronts. As  $T \rightarrow +\infty$ ,  $R(X, T) \rightarrow 0$ , which means in stable region all density waves eventually evolved into a uniform flow with increasing time.

## 4.2 Kdv equation

We consider the slowly varying behaviors for long waves near the neutral stability point. Slow variable  $X_l$  and  $T$  are defined as

$$X_l = \varepsilon(n_l + b_l t), T = \varepsilon^3 t \quad (17)$$

We set the headway as

$$\Delta x_{l,n} = h_l + \varepsilon^2 R_l(X_l, T) \quad (18)$$

Substituting Eq.(17).and Eq.(18) into Eq.(11) and expanding to the sixth order of  $\varepsilon$ , we obtain the following nonlinear partial differential equation

$$\begin{aligned}
& \varepsilon^3 a_l [b_l - V_l'(h_l)] \partial_{X_l} R_l + \varepsilon^4 \left[ b_l^2 - \frac{a_l}{2} (\alpha_l + 3\beta_{ll} + 3\beta_{2l}) V_l'(h_l) - \lambda_l b_l \right] \partial_{X_l}^2 R_l \\
& + \varepsilon^5 a_l \left\{ \partial_T R_l - \left[ \frac{1}{6} (\alpha_l + 7\beta_{ll} + 7\beta_{2l}) V_l'(h_l) + \frac{1}{2a_l} \lambda_l b_l \right] \partial_{X_l}^3 R_l - \frac{1}{2} V_l'(h_l) \partial_{X_l} R_l^2 \right\} \\
& + \varepsilon^6 \left[ (2b_l - \lambda_l) \partial_{X_l} \partial_T R_l - \frac{a_l}{24} (\alpha_l + 15\beta_{ll} + 15\beta_{2l}) V_l'(h_l) \partial_{X_l}^4 R_l \right. \\
& \left. - \frac{a_l}{4} (\alpha_l + 3\beta_{ll} + 3\beta_{2l}) V_l'(h_l) \partial_{X_l}^2 R_l^2 \right] = 0
\end{aligned} \tag{19}$$

where  $\partial_X \partial_T = \frac{\partial^2}{\partial X \partial T}$ .

Near the neutral stability point, we set  $\frac{a_l}{a_{ls}} = 1 + \varepsilon^2$ , where  $a_{ls} = \frac{V_l'(h_l) - \lambda_l}{0.5\alpha_l + 1.5(\beta_{ll} + \beta_{2l})}$

By taking  $b_l = V_l'(h_l)$ , we eliminate both the third-order and the forth-order term of  $\varepsilon$  from Eq.(19) and have

$$\partial_T R_l - f_1 \partial_{X_l}^3 R_l - f_2 R_l \partial_{X_l} R_l + \varepsilon \left[ -f_3 \partial_{X_l}^2 R_l + f_4 \partial_{X_l}^4 R_l + f_5 \partial_{X_l}^2 R_l^2 \right] = 0 \tag{20}$$

Where  $f_1 = \frac{1}{6} (\alpha_l + 7\beta_{ll} + 7\beta_{2l}) V_l'(h_l) + \frac{1}{2a_l} \lambda_l b_l$ ,  $f_2 = V_l'(h_l)$ ,  $f_3 = \frac{1}{2} (\alpha_l + 3\beta_{ll} + 3\beta_{2l}) V_l'(h_l)$

$$f_4 = \left[ \frac{\lambda (2V_l'(h_l) - \lambda)}{2a_s^2} + \frac{(\alpha_l + 7\beta_{ll} + 7\beta_{2l}) (2V_l'(h_l) - \lambda)}{6a_s} - \frac{\alpha_l + 15\beta_{ll} + 15\beta_{2l}}{24} \right] V_l'(h_l)$$

$$f_5 = \left( \frac{2V_l'(h_l) - \lambda}{2a_s} - \frac{1}{4} (\alpha_l + 3\beta_{ll} + 3\beta_{2l}) \right) V_l'(h_l)$$

In order to drive the regularized equation, we make the transformations as follows:

$$T = \sqrt{f_1} T_{kdv}, \quad X_l = -\sqrt{f_1} X_{lkdv}, \quad R_l = \frac{1}{f_2} R_{lkdv}$$

Thus, we obtain the KDV equation with a  $o(\varepsilon)$  correction term.

$$\partial_{T_{kdv}} R_{lkdv} - f_1 \partial_{X_{lkdv}}^3 R_{lkdv} - f_2 R_{lkdv} \partial_{X_{lkdv}} R_{lkdv} + \varepsilon \left[ -f_3 \partial_{X_{lkdv}}^2 R_{lkdv} + f_4 \partial_{X_{lkdv}}^4 R_{lkdv} + f_5 \partial_{X_{lkdv}}^2 R_{lkdv}^2 \right] = 0 \tag{21}$$

We ignore the  $o(\varepsilon)$  term and get the KDV equation with the soliton solution

$$R_{l0}(X_{lkdv}, T_{kdv}) = A \operatorname{sech}^2 \left[ \sqrt{\frac{A}{12}} \left( X_{lkdv} - \frac{A}{3} T_{kdv} \right) \right] \tag{22}$$

Where  $A = \frac{21f_1 f_2 f_3}{24f_1 f_5 - 5f_2 f_4}$ ,

Hence, we obtain the soliton solution of the KDV equation



$$\Delta x_{l,n}(t) = h_l + \frac{A}{V_l'(h_l)} \left(1 - \frac{a_{ls}}{a_l}\right) \sec h^2 \left\{ \left[ n + V_l'(h_l)t + \frac{A}{3} \left(1 - \frac{a_{ls}}{a_l}\right) t \right] \right. \\ \left. \times \sqrt{\frac{a_{ls} A}{2a_{ls}(\alpha_l + 7\beta_{1l} + 7\beta_{2l})V_l'(h_l) + 6\lambda_l V_l'(h_l)} \left(1 - \frac{a_{ls}}{a_l}\right)} \right\} \quad (23)$$

### 4.3 Mkdv equation

In unstable region we consider the slowly varying behaviors for long waves. Slow variable  $X_l$  and  $T$  are defined just as Eq. (17)

We set the headway as

$$\Delta x_{l,n} = h_{lc} + \varepsilon R_l(X_l, T) \quad (24)$$

Substituting Eq.(17) and Eq.(24) into Eq.(11) and expanding to the fifth order of  $\varepsilon$ , we obtain the following nonlinear partial differential equation

$$\varepsilon^2 a_l \left[ b_l - V_l'(h_{lc}) \right] \partial_{X_l} R_l + \varepsilon^3 \left[ b_l^2 - \frac{a_l}{2} (\alpha_l + 3\beta_{1l} + 3\beta_{2l}) V_l'(h_{lc}) - \lambda_l b_l \right] \partial_{X_l}^2 R_l \\ + \varepsilon^4 \left\{ a_l \partial_T R_l - \left[ \frac{a_l}{6} (\alpha_l + 7\beta_{1l} + 7\beta_{2l}) V_l'(h_{lc}) + \frac{1}{2} \lambda_l b_l \right] \partial_{X_l}^3 R_l \right. \\ \left. - \frac{1}{6} a_l V_l''(h_{lc}) \partial_{X_l} R_l^3 \right\} + \varepsilon^5 \left\{ (2b_l - \lambda_l) \partial_{X_l} \partial_T R_l \right. \\ \left. - \left[ \frac{a_l}{24} (\alpha_l + 15\beta_{1l} + 15\beta_{2l}) V_l'(h_{lc}) + \frac{1}{6} \lambda_l b_l \right] \partial_{X_l}^4 R_l \right. \\ \left. - \frac{1}{12} a_l (\alpha_l + 3\beta_{1l} + 3\beta_{2l}) V_l''(h_{lc}) \partial_{X_l}^2 R_l^3 \right\} = 0 \quad (25)$$

Where  $V_l'(h_{lc}) = \frac{dV(\overline{\Delta x_{l,n}})}{d\overline{\Delta x_{l,n}}} \Big|_{\overline{\Delta x_{l,n}}=h_{lc}}$   $V_l''(h_{lc}) = \frac{d^2V(\overline{\Delta x_{l,n}})}{d\overline{\Delta x_{l,n}}^2} \Big|_{\overline{\Delta x_{l,n}}=h_{lc}}$

Near the critical point  $(h_{lc}, a_{lc})$ , taking  $\frac{a_l}{a_{lc}} = (1 - \varepsilon^2)$ ,  $b_l = V_l'(h_l)$  and eliminating both the second-order and the third-order term of  $\varepsilon$ , Eq.(25) can be simplified as

$$\partial_T R_l - g_1 \partial_{X_l}^3 R_l + g_2 R_l \partial_{X_l} R_l + \varepsilon \left[ g_3 \partial_{X_l}^2 R_l + g_4 \partial_{X_l}^4 R_l + g_5 \partial_{X_l}^2 R_l^3 \right] = 0 \quad (26)$$

Where

$$\begin{aligned}
g_1 &= \left[ \frac{1}{6}(\alpha_l + 7\beta_{1l} + 7\beta_{2l}) + \frac{1}{2}\lambda_l \right] V_l'(h_{lc}), \quad g_2 = -\frac{1}{6}V_l''(h_{lc}), \quad g_3 = \frac{1}{2}(\alpha_l + 3\beta_{1l} + 3\beta_{2l})V_l'(h_{lc}) \\
g_4 &= \left[ \frac{\lambda_l(2V_l'(h_{lc}) - \lambda_l)}{2a_{lc}^2} + \frac{(2b_l - \lambda_l)}{6a_{lc}}(\alpha_l + 7\beta_{1l} + 7\beta_{2l}) - \frac{1}{24}(\alpha_l + 15\beta_{1l} + 15\beta_{2l}) - 6\lambda_l \right] V_l'(h_{lc}) \\
g_5 &= \left[ \frac{(2V_l'(h_{lc}) - \lambda_l)}{6a_{lc}} - \frac{1}{12}(\alpha_l + 3\beta_{1l} + 3\beta_{2l}) \right]
\end{aligned}$$

We make such transformations as  $T = \frac{1}{g_1}T_m$   $R_l = \sqrt{\frac{g_1}{g_2}}R_{lm}$

Then we obtain the modified KDV equation with a  $o(\varepsilon)$  correction term.

$$\partial_T R_{lm} - \partial_{X_l}^3 R_{lm} + g_2 \partial_{X_l} R_{lm}^3 + \frac{\varepsilon}{g_1} \left[ g_3 \partial_{X_l}^2 R_{lm} + g_4 \partial_{X_l}^4 R_{lm} + \frac{g_1 g_5}{g_2} \partial_{X_l}^2 R_{lm}^3 \right] = 0 \quad (27)$$

If we ignore  $o(\varepsilon)$  term, this is just the modified KDV equation with a kink solution as the desired solution

$$R_l(X_l, T) = \sqrt{\frac{g_1}{g_2}} B \tanh \left[ \sqrt{\frac{B}{2}} (X_l - B g_1 T) \right] \quad (28)$$

Where  $B = \frac{5g_2 g_3}{2g_2 g_4 - 3g_1 g_5}$

Thus, we obtain the kink solution of the headway

$$\begin{aligned}
\Delta x_{l,n}(t) &= h_{lc} + \sqrt{\frac{g_1 B}{g_2} \left( \frac{a_{lc}}{a_l} - 1 \right)} \tanh h \times \left\{ \sqrt{\frac{B}{2} \left( \frac{a_{lc}}{a_l} - 1 \right)} \times \left[ n + V_l'(h_{lc})t - B g_1 \left( \frac{a_{lc}}{a_l} - 1 \right) t \right] \right\} \\
&= h_{lc} + \sqrt{\frac{(\alpha_l + 7\beta_{1l} + 7\beta_{2l})V_l'(h_{lc}) + 3\lambda_l V_l'(h_{lc})}{-V_l''(h_{lc})} \left( \frac{a_{lc}}{a_l} - 1 \right) B} \\
&\times \tanh h \left\{ \sqrt{\frac{B}{2} \left( \frac{a_{lc}}{a_l} - 1 \right)} \times \left[ n + V_l'(h_{lc})t - B \left( \frac{1}{6}(\alpha_l + 7\beta_{1l} + 7\beta_{2l}) + \frac{1}{2}\lambda_l \right) V_l'(h_{lc}) \left( \frac{a_{lc}}{a_l} - 1 \right) t \right] \right\} \quad (29)
\end{aligned}$$

## 5 Conclusions

The two-lane car-following model in this paper is the extension of the FVDM in single lane. By considering the lateral effects, the model consists not only of the nearest vehicle on neighbor lane but also of its preceding vehicle. Linear analysis of the model shows that the consideration of lateral effects of the nearest vehicle on neighbor lane could stabilize the traffic flow. The solutions of Burgers equation, KDV equation, and

MKDV equation have been derived to describe density waves in three regions respectively.

## Conflict of Interests

The authors declare that there is no conflict of interests regarding the publication of this paper.

## Acknowledgments

This work is partially supported by the National Natural Science Foundation of China under the Grant No. 61863032 and the China Postdoctoral Science Foundation Funded Project (Project No.: 2018M633653XB) and the “Qizhi” Personnel Training Support Project of Lanzhou Institute of Technology (Grant No. 2018QZ-11) and the National Natural Science Foundation of China under the Grant No. 11965019.

## References

1. L.A. Pipes. An operational analysis of traffic dynamics[J]. Journal of Applied Physics, 1953, 24: 274-281.
2. D.W. Liu, Z.K. Shi, W.H. Ai. Enhanced stability of car-following model upon incorporation of short-term driving memory [J]. Communications in Nonlinear Science and Numerical Simulation, 2016, 47: 139-150.
3. D.W. Liu, Z.K. Shi, W.H. Ai. A new car-following model accounting for impact of strong wind [J]. Mathematical Problems in Engineering, 2017, 1: 1-12.
4. D.W. Liu, Z.K. Shi, W.H. Ai. An improved car-following model from the perspective of driver's forecast behavior [J]. International Journal of Modern Physics C, 2017, 28(4).
5. Z.K. Shi, W.H. Ai, D.W. Liu. An Improved Macro Model of Traffic Flow with the Consideration of Ramps and Numerical Tests [J]. Mathematical Problems in Engineering, 2015(136451).
6. R. Jiang, Q.S. Wu, Z.J. Zhu. Full velocity difference model for a car-following theory [J]. Physical Review E, 2001, 64: 63-66.
7. Ge H.X., Dai S.Q., Dong L.Y. and Xue, Y. Stabilization effect of traffic flow in an extended car-following model based on an intelligent transportation system application [J]. Physical Review E, 2004, 70: 066134.
8. Chen Xuan; Gao Zi-You; Zhao Xiao-Mei. Study on the two-lane feedback controlled car-following model [J]. Acta Physica Sinica, 2007, 56: 2024-2029.
9. Zheng Liang; Ma Shou-Feng; Zhong Shi-Quan. Influence of lane change on stability analysis for two-lane traffic flow [J]. Chinese Physics B, 2011, 20, 088701.
10. Nagatani T. Jamming transitions and the modified Korteweg-de Vries equation in a two-lane traffic flow [J]. Physica A, 1999, 265: 297-310.
11. Peng, Guanghan. A new lattice model of two-lane traffic flow with the consideration of optimal current difference [J]. Physics Letters A, 2013, 377: 2027-2033.
12. Peng, Guanghan. A new lattice model of the traffic flow with the consideration of the driver anticipation effect in a two-lane system [J]. Nonlinear Dynamics, 2013, 73: 1035-1043.

13. Peng Guang-Han. A New Lattice Model of Two-Lane Traffic Flow with the Consideration of the Honk Effect[J]. Communications in the Oretical Physics, 2013,60: 485-490.
14. Peng, Guanghan. A new lattice model of traffic flow with the consideration of individual difference of anticipation driving behavior[J].Communications in Nonlinear Science and Numerical SimulationI 2013,18: 2801-2806.
15. T.Q. Tang, H.J. Huang, Z.Y. Gao.Stability of the car-following model on two lanes[J].Physical Review E ,2005,72 ,066124.