

Queue-aware Uplink Scheduling: Analysis, Implementation, and Evaluation

Amr Rizk* and Markus Fidler†

*University of Massachusetts Amherst, USA

†Leibniz Universität Hannover, Institute of Communications Technology, Germany

Abstract—Adaptive resource allocation arises naturally as a technique to optimize resource utilization in communication networks with scarce resources under dynamic conditions. One prominent example is cellular communication where service providers seek to utilize the costly resources in the most effective way. In this work, we investigate an uplink resource allocation scheme that takes into account the buffer occupation at the transmitter to retain a given level of quality of service (QoS). First, we regard exact results for the class of Poisson traffic where we investigate the sensitivity of the resource adaptation and QoS level to the actuating variables. We show relevant resource savings in comparison with a static allocation. Further, we regard a queueing setting with general random arrival and service processes. In particular, we consider the service of wireless fading channels. We show two different resource adaptation mechanisms that depend on the strictness of different assumptions. Finally, we present simulation results that show substantial resource savings using the queue-aware scheduling scheme, where we provide insight on the implementation and operation of such an adaptive system.

I. INTRODUCTION

Many components of communication networks are subject to variability. This includes the usage behavior of communicating parties, as well as, the service provided by the network. While the user behavior translates to a variable resource demand, the provisioned service is constricted by expenditure and the technological state-of-the-art. This inherent variability is the *raison d'être* for many optimizations found in communication networks. An intrinsic difficulty in cellular wireless communication is the fading nature of the channel which causes the transmission rate to vary over time. Hence, to better utilize the wireless channel, respectively, to provide quality of service guarantees in cellular communication networks, a base station has to estimate the statistical properties of the wireless fading channel. For example in LTE this estimate is captured in the channel quality indicator (CQI) [1].

In addition to channel quality estimates, current LTE systems offer a valuable source of information, i.e., buffer status reports (BSR) [2], that can be exploited for adaptive resource allocation [3]. In Fig. 1a) we depict a user equipment (UE) that transmits BSRs in uplink direction to signal the buffer occupancy to the base station. The base station takes the buffer occupancy into account when updating the resource allocation

The research leading to these results has received funding from the European Research Council under an ERC Starting Grant "UniQue".

ISBN 978-3-901882-68-5 © 2015 IFIP

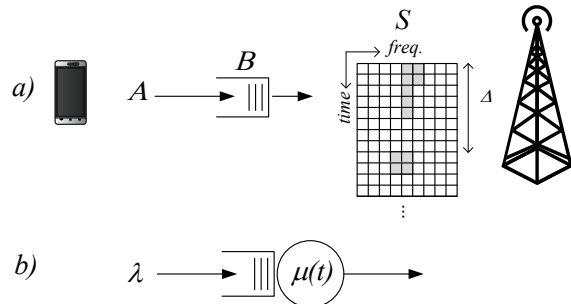


Fig. 1.a) Example of queue-aware scheduling in cellular networks. The base station decides on the amount of uplink service S depicted as a varying number of resource blocks (gray) granted to a UE depending on its transmit buffer filling B . The scheduling epoch is denoted Δ .

b) Abstraction of queue-aware scheduling with a single user as a queueing system with an adaptive mean service rate $\mu(t)$. The service rate is adjusted at scheduling epochs of length Δ , to maintain a small queue.

to the UE. This is illustrated in Fig. 1a) as a variable amount of (shaded) time-frequency resource blocks that are granted to the UE. In addition, Fig. 1 comprises the scheduling epoch Δ , i.e., the recurrence period of the resource scheduling operation.

Promising applications of adaptive resource allocation include jitter control, substantial radio resource savings, as well as, battery savings on the UE side. Jitter, i.e., high delay variations, may arise in wireless communications due to the fading characteristics of the channel. It is known that jitter has a strong adverse influence on the quality of experience. Adaptive resource allocation can mitigate the impact of the channel fading to reduce jitter at the receiver. Further, adaptive resource control may achieve substantial resource savings compared to static resource grants due to a more effective use of available information.

Despite the expected benefits and the recent significant progress in the analysis of QoS metrics, few strategies are derived that use analytical models to consider adaptive resource optimization under QoS constraints. In this work we provide an analytical approach to adaptive resource allocation based on buffer occupancy. We present a queue-aware scheduling scheme that adapts the amount of resources provided to a single UE under probabilistic QoS constraints.

Consider the scenario in Fig. 1a) where traffic denoted A arrives at a UE transmit buffer. The UE regularly signals BSRs that include the transmit buffer filling B to the base station, which in turn seeks to adapt the service S , i.e., the uplink

bandwidth resource grants, based on the knowledge of BSR and CQI. First, we regard the abstraction in Fig. 1b) with a queueing system fed by Poisson traffic arrivals of mean rate λ and a time-varying mean service rate $\mu(t)$. We present a study of exact results for Poisson traffic that clearly shows resource savings when queue-aware scheduling is deployed. One desired property of adaptive resource allocation is robustness with respect to variations of the actuating variables. Hence, we present a sensitivity study that shows the impact of actuating variables, as well as, the system robustness with respect to misadaptation. In a practical scenario this would, for example, capture imperfect CQI. For general arrival and service processes we present an analytical framework to implement queue-aware scheduling that is based on the stochastic network calculus. We distinguish two regimes for the adaptive system that we denote frequent and infrequent adaptation. Consequently, we provide a detailed analysis of two resource adaptation schemes showing evaluation results and insight on the implementation and operation of such systems. We include a compact investigation of the adaptive system in multi-user scenarios. The main contributions of this paper are:

- For the class of Poisson processes, we present exact results to quantify best-case resource savings, i.e., given full knowledge of the traffic and service statistics.
- Our model reveals an important relation of the average traffic arrival rate, the scheduling epoch length, and the target queue constraint. We identify two regimes, one where adaptive scheduling is effective and one where it is not. The result is significant as it shows in a mathematical, exact framework that there are relevant cases where an adaptive system cannot benefit from the additional information provided by BSRs.
- Our results show that the adaptive system can stabilize the queue even in case of a systematic service rate misadaptation. This robustness is important, since in practice an adaptive system can only *estimate* the number of radio resource blocks that are required to achieve a target service rate.
- Our mathematical treatment of queue-aware scheduling is applicable to a broad class of arrival and service processes known in the stochastic network calculus.

The rest of this paper is structured as follows. In Sect. II we discuss related work on the analysis of adaptive resource allocation techniques and queueing systems with variable service rates. Sect. III presents a study of exact results for Poisson traffic. In Sect. IV we introduce a model for wireless systems and provide an introduction to the analytical framework. Sect. V-A and V-B present a description of the implementation of frequent and infrequent adaptation including evaluation results and insight on the implementation. In Sect. V-C we include simulation results for multi-user scenarios under different scheduling policies. We conclude the paper in Sect. VI.

II. RELATED WORK

We find that studies related to this work were mainly conducted in the context of *i*) the optimization of service

policies for queueing systems and *ii*) the optimization of power and rate control in cellular networks. First, we will review works with the first objective *i*) showing the main difference to the work at hand.

The authors of [4]–[6] consider a dynamic control approach (speed scaling) of the service rate of $M|M|1$, respectively $M|GI|1$ processor sharing queues, that depends on the queue state at each time instant. The service rate is optimized with respect to service costs that are defined as a function of the queue length at each time point, as well as, the instantaneous service rate. The result is a service policy, i.e., an optimization for entire service sample paths with respect to a given criterion. For example, the authors of [4] provide recursive algorithms to minimize the average service costs. General tradeoffs in the design of speed scaling controllers for queues are shown in [7], e.g., combining the response time with job energy consumption. The authors show that for certain schedulers only two of the three attributes “optimality, fairness and robustness” can be achieved. The work in [8] studies multi-class $M|G|1$ queues with variable service rates. The authors show scheduling policies that minimize service costs associated with the instantaneous service through convex functions. The authors of [9] consider an $M|M|1$ queue with time varying externally Markov modulated server speed. Although not explicitly given, the authors show a method to numerically obtain the average waiting time. In [10] the authors straightforwardly employ the Pollaczek-Khinchine formula in conjunction with a power model, that is known for networks on-chip to minimize the average power consumption in an $M|G|1$ queue.

The work at hand differs basically from the related work above in the analysis of an epoch based adaptation scheme that takes *general* arrival and service processes into account. We consider a probabilistic QoS constraint as optimization metric in contrast to service cost functions.

The second category of related works comprises rate and power optimization in cellular networks such as [11]–[14]. Typically, the criterion for optimization is the average queueing delay. In [11] the authors regard a transmitter with variable rate that serves a queue filled at a constant rate. The authors perform optimizations over power and rate policies for a single user scenario to minimize the average delay under power constraints. The technique used is dynamic programming which provides numerical solutions for a predefined cost function that consists of a weighted sum of the buffer length and the transmission power. Using a similar approach the authors of [13] provide an optimal service policy for a finite service sample path length. They assume a channel of Gilbert-Elliot type and a linear relationship of transmission power and rate. The work in [14] considers a scenario with arrivals and service processes given by Markov chains where data arriving from higher layers is buffered until transmission. The authors provide results on regulating the user transmission rate and power to control the average transmission power and average delay using concepts from Markov decision theory. Further, BSRs, respectively, the transmit queue length, have been used for scheduling optimization in [3], [15], [16]. In [3] BSRs

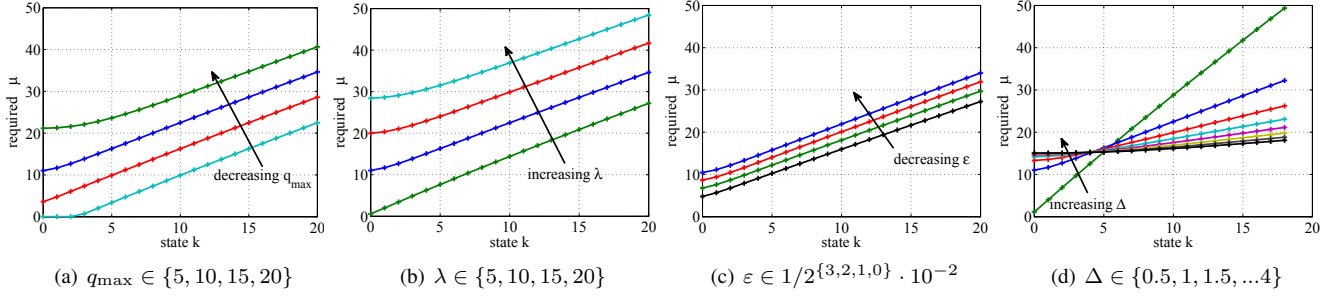


Fig. 2. Required service rate μ to satisfy the bound (1) depending on the initial queue state k at the beginning of the scheduling epoch. Influence of parameters: (a) bound on the queue length at the end of the epoch q_{\max} , (b) arrival rate λ , (c) violation probability ε , (d) scheduling epoch length Δ . Baseline (blue curve): $q_{\max} = 10, \lambda = 10, \varepsilon = 10^{-2}, \Delta = 1$.

are used to improve packet drop rates in OFDM downlink transmissions. In [15] the authors model the polling service of an IEEE 802.16 network using a Markov model to show the impact of queue length aware rate and bandwidth control on the average delay. In [16] BSRs are used in a scheduling metric to distribute physical resource blocks over different UEs at relay nodes.

Key differences to the related work above are that we regard an online scheme that enables adapting the parameters for a scheduling epoch during the runtime of the system. In contrast to objectives in the related work such as minimizing the average delay or a weighted sum of buffer length and the transmission power, we adapt the resource allocation with respect to the tail of the queue size distribution. This provides a natural relation of the provided quality of service during a scheduling epoch to the adaptively allocated resources.

III. EXACT RESULTS FOR POISSON TRAFFIC: TRADEOFFS AND SENSITIVITY

In this section, we develop a model of queue-aware scheduling for Poisson traffic. We use this basic model to provide exact results that yield relevant insights. We will relax the assumptions in Sect. IV where we consider general arrival and service processes.

A. Epoch-based Resource Allocation

Next, we use the model of a single queue to express the adaptation of the mean service rate $\mu(t)$ at multiples of the scheduling epoch length Δ to provide a probabilistic bound on the queue length at the end of the scheduling epoch. The service rate $\mu(t)$ is chosen for a scheduling epoch Δ depending on the initial queue length at the start of the epoch, as well as, the arrival rate λ . With respect to the wireless application scenario in Fig. 1, the adaptive system models a base station that decides on the amount of resources it will provide to a UE during a scheduling epoch given knowledge of the UE transmit buffer filling and its average arrival rate. In the following, we investigate the tradeoffs and fundamental limits of such a system and conduct a sensitivity analysis with respect to misadaptation. We will show that queue-aware scheduling achieves target QoS constraints and provides significant resource savings.

The service rate $\mu(t)$ is adjusted based on the queue state k at the beginning of the epoch. During the epoch Δ the average service rate is fixed such that the probability that the queue is in a state higher than q_{\max} after Δ is bounded by ε , i.e.,

$$\sum_{l=q_{\max}+1}^{\infty} p_{kl}(\Delta) \leq \varepsilon \quad (1)$$

with $p_{kl}(\Delta)$ being the probability that the queuing system is in state l at time Δ after initially being in state k . The transient behavior of the $M|M|1$ queuing system has been investigated in [17], [18] leading to the closed form solution

$$p_{kl}(\Delta) = e^{-(\lambda+\mu)\Delta} \left[\rho^{\frac{l-k}{2}} \mathcal{I}_{l-k}(z\Delta) + \rho^{\frac{l-k-1}{2}} \mathcal{I}_{l+k+1}(z\Delta) + (1-\rho)\rho^l \sum_{j=l+k+2}^{\infty} \rho^{-\frac{j}{2}} \mathcal{I}_j(z\Delta) \right] \quad (2)$$

with utilization $\rho = \lambda/\mu$, $z = 2\mu\sqrt{\rho}$ and the modified Bessel function of the first kind $\mathcal{I}_{(\cdot)}(\cdot)$. We denote this system as the adaptive system, where we compute μ for the next epoch from (2) given the queue size at the beginning of the epoch is k . External parameters are q_{\max} , λ , Δ , ε .

First, we illustrate the operation of the adaptive system. Figure 2 shows the required service rate μ given the queue state k at the beginning of the scheduling epoch. This adaptive system may be viewed as a controller with input parameter k and an actuating variable μ . Next we evaluate how the parameters of the adaptive system, q_{\max} , λ , ε and Δ , influence the adaptation of the service rate μ . Fig. 2(a) - 2(c) show the required service rate, that increases with the initial state k . It also shows the increase of the required service rate μ with tighter constraints, i.e., with decreasing q_{\max} , increasing arrival rate λ or decreasing violation probability ε from (1). Note that the curves are equidistant with linear change in q_{\max} and λ , respectively, with logscale change in ε . Also note the nonlinear behavior for boundary scenarios, i.e., small q_{\max} and small initial k . Fig. 2(d) shows the impact of the length of the epoch Δ on the required service rate. Smaller Δ cause a stronger adjustment.

B. Improvement on the Static System

Next, we compare the adaptive system to a static $M|M|1$ system with identical arrival rate λ and a fixed equivalent

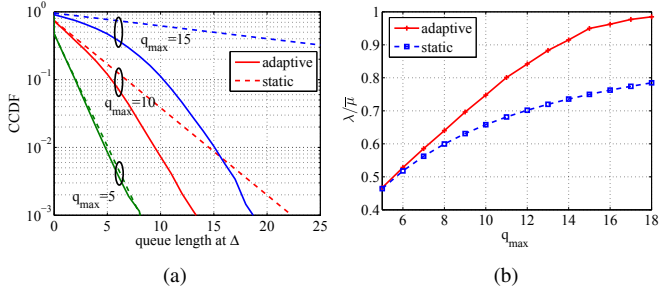


Fig. 3. *a)* The regimes of adaptation: Different $q_{\max} \in \{5, 10, 15\}$ with corresponding static equivalents. The adaptive $M|M|1$ system outperforms the equivalent system with constant μ . *b)* Resource saving with adaptive allocation. The utilization increases with q_{\max} as the adaptive $M|M|1$ system makes efficient use of the variations of the service rate μ . In comparison we show the utilization for static scenarios that attain the same probabilistic bound on the queue length. The adaptive system runs at a higher utilization than the comparable static system and hence saves resources.

service rate $\bar{\mu} = E[\mu(t)]$. We denote this system the static system and show results from discrete event simulations that compare its performance to the adaptive system. Figures 3 and 4 use the basic parameter set $\lambda = 10$, $\Delta = 1$, $\varepsilon = 10^{-2}$ and for the simulation results we considered 10^4 epochs. First, consider the case $q_{\max} = 10$ in Fig. 3(a). The figure shows the CCDF of the queue length at multiples of the scheduling epoch Δ for the adaptive and for the static system. The adaptive system attains the QoS requirement, i.e., the queue length exceeds $q_{\max} = 10$ at most with probability $\varepsilon = 10^{-2}$, and outperforms the static system in terms of the queue length distribution. The reason behind this performance difference is that the adaptive system reduces the service rate for epochs with small initial queue fillings (and vice versa for epochs with large initial queue fillings). Hence, the adaptive system continuously minimizes idle times where resources would be effectively wasted. A downside is that data may wait longer in the queue if the queue length is much smaller than q_{\max} . The adaptive system allocates only low μ in case of a small initial queue length, e.g., $\mu = 0$ for $k \leq 2$ and $q_{\max} = 20$ (see Fig. 2(a)). Data arriving during such a scheduling epoch wait longer in the queue than in case of the static system.

Next, we inspect the utilization of the adaptive system defined as $\lambda/\bar{\mu}$, i.e., the arrival rate divided by the average service rate of the adaptive system. Figure 3(b) shows that the adaptive system runs at a higher utilization with increasing q_{\max} . We find that a key relation is the ratio of $\lambda\Delta$ to q_{\max} for a given ε , i.e., the average amount of arrivals in one epoch vs. the bound on the queue length at the end of the epoch. The figure shows that for increasing q_{\max} with respect to $\lambda\Delta$ the adaptive system may run under very high utilization, while still maintaining the probabilistic bound (1). The figure also depicts the required utilizations for the static system to provide the same probabilistic bound on the queue distribution. The difference in Fig. 3(b) reveals the substantial resource saving provided by the adaptive system. Observe that the difference between the adaptive system and the static system is apparent for $q_{\max} \gg \lambda\Delta$. The adaptive system is

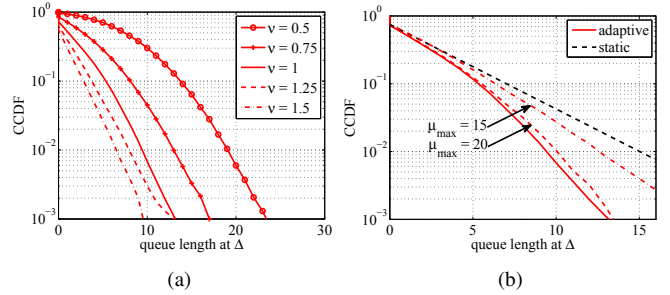


Fig. 4. *a)* Robustness with respect to service rate misadaptation. The provided service rate at each scheduling epoch is a scaled version $\nu\mu$ of the required service μ . For $\nu \neq 1$ the CCDF is shifted but the queue does not grow unbounded. *b)* Robustness with respect to service rate limitation. The provided service rate is bounded by μ_{\max} . The CCDF is shifted with respect to the unconstrained scenario.

aware of the queue length at the beginning of the scheduling epoch, yet, the actual arrivals are unknown in advance and may vary significantly. The information on the initial queue length becomes less helpful if the unknown, i.e., the traffic amount in Δ , predominates, i.e., if $q_{\max} \ll \lambda\Delta$. This is also reflected by the CCDFs for $q_{\max} = \{5, 15\}$ in Fig. 3(a). Hence, the adaptive system is favorable for $q_{\max} \gg \lambda\Delta$.

C. Robustness

One desired property of such an adaptive system is robustness with respect to misadaptation, which we define as a queue that does not grow unbounded if the actual service rate is only a scaled version $\nu\mu$ of the required service rate μ . This robustness property is important in practice. For example, consider the cellular system from Fig. 1, where the base station uses CQI to estimate the channel condition. It is desirable that an adaptive resource allocation scheme is robust with respect to deviations of these estimates from actual channel conditions. For a static system an allocation of $\nu\mu$ could lead to instability, hence, to an unbounded queue. Figure 4(a) shows the impact of misadaptation for different values of ν and $q_{\max} = 10$. We observe that the queue length distribution is shifted for $\nu \neq 1$ and that the probabilistic bound is violated as expected for $\nu < 1$. However, the queue length does not grow unbounded.

A second requirement of practical implementations is that the adaptive service rate $\mu(t)$ is upper bounded by some finite μ_{\max} . We simulate the operation of the adaptive system under service limitation and show the results in Fig. 4(b). Note that the queue length distribution is shifted away with respect to the unconstrained scenario with stricter μ_{\max} .

In this section, we provided a proof of concept for queue-aware scheduling for the example of Poisson traffic. The adaptive system retains a given probabilistic bound on the queue length while it may substantially save resources. Interesting though are constellations, which we showed, that hardly comprise resource savings. This reveals that the operation of queue-aware scheduling is non-trivial and requires a careful analysis. The question of how to exploit the potential resource savings in a wireless system that deviates from the Poisson assumption is a difficult challenge. In the next sections we will

relax the Poisson traffic assumption and present implementations of queue-aware scheduling for wireless fading channels and general traffic arrivals.

IV. MODELING WIRELESS SYSTEMS

Next, we will formulate a basic queueing model from the network calculus to include general arrival and service processes. We will adopt a basic channel model for wireless communication systems that is known from [19].

A. Queueing Model

We apply concepts of the framework of the stochastic network calculus [20]–[24], and consider a discrete time, lossless and work-conserving queueing system. Cumulative traffic arrivals to the system are denoted $A(\tau, t)$, i.e., the cumulative amount of bits arriving in the time interval $(\tau, t]$ for $t \geq \tau \geq 0$. Hence, $A(t, t) = 0$ for all $t \geq 0$ and there are no arrivals for $t \leq 0$. By convention we use $A(t)$ to denote the arrivals between $(0, t]$, where $A(t)$ is a non-negative non-decreasing random process that passes through the origin. Further, we use λ to denote the average arrival rate, i.e., $\lambda = \lim_{t \rightarrow \infty} A(t)/t$. The cumulative departures of the queueing system up to time t denoted $D(t)$ are related to the arrivals through the service provided by the system. The queueing model considers the service in $(\tau, t]$ as a random process $S(\tau, t)$ which is non-increasing in τ and non-decreasing in t . Further, note that $S(t, t) = 0$ for all $t \geq 0$.

For a work-conserving system with a time-varying service $S(\tau, t)$ it holds for all $t \geq \tau \geq 0$ where τ, t fall into the same busy period that $D(t) \geq D(\tau) + S(\tau, t)$ [25], [26]. This is referred to as strict service. Systems offering strict service also provide a so-called adaptive service curve [22], [26] such that for all $t \geq \tau \geq 0$ it holds that

$$D(t) \geq \min \left[D(\tau) + S(\tau, t), \inf_{u \in [\tau, t]} \{A(u) + S(u, t)\} \right]. \quad (3)$$

The stochastic evaluation of queueing systems with respect to performance metrics, e.g., backlog and delay, frequently uses non-random lower bounding functions $\mathcal{S}(t - \tau)$ of the service process $S(\tau, t)$ defined for all $t \geq \tau \geq 0$ as

$$\mathbb{P}[S(\tau, t) \geq \mathcal{S}(t - \tau)] \geq 1 - \varepsilon_p, \quad (4)$$

with a violation probability ε_p . For systems providing adaptive service (3) we require, however, a bound on $S(\tau, t)$ that is valid for an entire interval to derive a probabilistic extension of (3) as defined in [22] for $t \geq \tau \geq 0$ as

$$\mathbb{P} \left[D(t) \geq \min \left[D(\tau) + \mathcal{S}(t - \tau), \inf_{u \in [\tau, t]} \{A(u) + \mathcal{S}(t - u)\} \right] \right] \geq 1 - \varepsilon_s. \quad (5)$$

A bound on $S(\tau, t)$ for an entire interval is given as

$$\mathbb{P}[S(u, t) \geq \mathcal{S}(t - u), \forall u \in [\tau, t]] \geq 1 - \varepsilon_s \quad (6)$$

for $t \geq \tau \geq 0$. It is known as an ε -effective service curve in [22], [27]. For a function $\mathcal{S}(t)$ satisfying (4) with ε_p we

find that it satisfies (6) with $\varepsilon_s = (t - \tau)\varepsilon_p$. This is directly obtained by using Boole's inequality as

$$\begin{aligned} & \mathbb{P}[\exists u \in [\tau, t] : S(u, t) < \mathcal{S}(t - u)] \\ & \leq \sum_{u=\tau}^{t-1} \mathbb{P}[S(u, t) < \mathcal{S}(t - u)] = \sum_{u=\tau}^{t-1} \varepsilon_p = (t - \tau)\varepsilon_p = \varepsilon_s. \end{aligned}$$

In the following, we review a known model of the Rayleigh fading channel including a corresponding bound in the sense of (6) on its service process $S(\tau, t)$.

B. Wireless Channel Model

We adopt the basic concept of a wireless transmission over a fading channel from [19]. We estimate the capacity in one time slot in a block fading model from the Shannon capacity formula as $C = W \log_2(1 + \gamma_i)$ with channel bandwidth W and γ_i denoting the signal-to-noise ratio (SNR) in the i th block. We consider a time slotted service process with a slot length that is congruent with the block length in the block fading model. The service process is composed of iid increments¹ c_i given as $c_i = \frac{W\delta}{\ln 2} \ln(1 + \gamma_i)$, with fixed time slot length δ and random γ_i . Here, c_i presents the number of bits that can be served in the i th slot. For convenience we will use the shorthand notation $\beta = \frac{W\delta}{\ln 2}$. Considering a Rayleigh fading channel, it follows that γ_i is exponentially distributed with parameter η and average SNR $E[\gamma] = 1/\eta$. The service process $S(\tau, t)$ is given as $S(\tau, t) = \sum_{i=\tau+1}^t c_i$, for $0 \leq \tau < t$. Given the service process $S(\tau, t)$ for a Rayleigh fading channel with SNR parameter $1/\eta$, the function

$$\mathcal{S}(t) = \frac{1}{\theta} \left(\ln(\varepsilon_p) - t[\eta + \theta\beta \ln(\eta) + \ln(\Gamma(1 - \theta\beta, \eta))] \right) \quad (7)$$

satisfies the condition (4) with violation probability ε_p . Here, $\theta > 0$ is a free parameter that can be optimized and $\Gamma(\cdot, \cdot)$ denotes the incomplete gamma function. The derivation of (7) is given as

$$\begin{aligned} \mathbb{P}[S(\tau, t) < \mathcal{S}(t - \tau)] & \leq e^{\theta\mathcal{S}(t-\tau)} M_S(-\theta, t - \tau) \\ & = e^{\theta\mathcal{S}(t-\tau)} (M_{c_i}(-\theta))^{t-\tau} := \varepsilon_p, \end{aligned} \quad (8)$$

where we used Chernoff's lower bound with the Laplace transform $M_S(-\theta, t - \tau)$ of $S(\tau, t)$ for $\theta \geq 0$. Then we used the iid property of the increments of $S(\tau, t)$ and equated the expression to ε_p . Using the Laplace transform of one increment $M_{c_i}(-\theta) = e^{\eta\theta\beta} \Gamma(1 - \theta\beta, \eta)$ that is known from [28] and solving for $\mathcal{S}(t)$ yields the result (7).

In the next section we will use the channel and queueing model to implement two queue-aware scheduling schemes.

V. IMPLEMENTATION OF QUEUE-AWARE SCHEDULING

In this section we will show two implementations of queue-aware scheduling that we denote frequent and infrequent adaptation, respectively. We will draw conclusions on the requirements and operation of such adaptive systems. In addition, we will present a study of deploying the adaptive

¹The assumption is reasonable if the time slot duration is large enough compared to the channel coherence time [19].

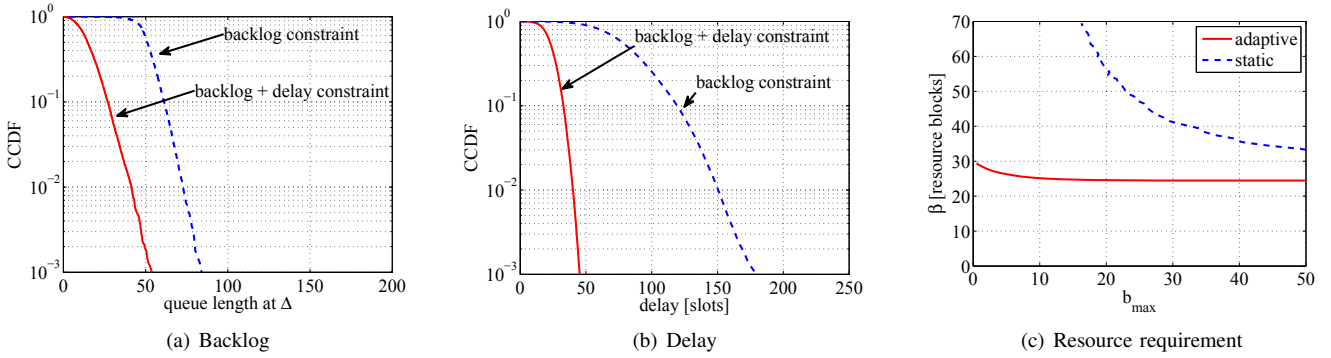


Fig. 5. Performance of frequent adaptation: *a) + b)* The adaptive system uses either a backlog constraint or a combined backlog and delay constraint to grant resources to the transmitter in every scheduling epoch. *c)* Amount of resource blocks β required to retain a given backlog bound b_{\max} and $\varepsilon = 10^{-2}$. The static system has a fixed β . For the adaptive system we plot the average β . The adaptive system saves resources by running at a high utilization.

system in a multi-user cellular network showing performance results for different types of schedulers.

A. Frequent Adaptation

First, we present queue-aware scheduling with frequent adaptation. Here, we assume a small epoch length Δ in the sense of $\lambda\Delta \ll b_{\max}$, where b_{\max} is the desired backlog bound at the end of the scheduling epoch that may be exceeded at most with probability ε . The system is the Rayleigh fading channel as described in Sect. IV.

Generally, the backlog of a queueing system at time t is defined as $B(t) = A(t) - D(t)$. In the following, we will denote the start of the current epoch by τ if not stated otherwise. Given the epoch $(\tau, \tau + \Delta]$ with arrivals $A(\tau, \tau + \Delta)$ and initial backlog $B(\tau)$ we calculate the required resources, e.g., bandwidth, such that $\mathbb{P}[B(\tau + \Delta) \leq b_{\max}] \geq 1 - \varepsilon$ is attained. Taking the definition of backlog, it follows directly for systems offering strict service $D(t) \geq D(\tau) + S(\tau, t)$ for $t \geq \tau \geq 0$ where τ, t fall into the same busy period that

$$B(t) \leq B(\tau) + A(\tau, t) - S(\tau, t),$$

i.e., a basic relation of the backlog at time τ and at time t given the arrivals $A(\tau, t)$ and the service $S(\tau, t)$. Let τ be the beginning of the epoch and $t = \tau + \Delta$ be the end of it. We substitute $S(\Delta)$ from (4) for $S(\tau, \tau + \Delta)$ to find

$$\mathbb{P}\left[B(\tau + \Delta) \leq B(\tau) + A(\tau, \tau + \Delta) - S(\Delta)\right] \geq 1 - \varepsilon,$$

with ε being the violation probability from (4). Given the non-trivial case $B(\tau) + A(\tau, \tau + \Delta) > b_{\max}$, we equate $B(\tau) + A(\tau, \tau + \Delta) - S(\Delta)$ with b_{\max} and solve for

$$S(\Delta) = B(\tau) + A(\tau, \tau + \Delta) - b_{\max} \quad (9)$$

that is the required service to ensure b_{\max} with violation probability ε . Finally, we substitute the service characterization of the Rayleigh fading channel (7) for $S(\Delta)$ in (9) to compute the required resource allocation β given average SNR $1/\eta$.

A refinement of the implementation above is to include an additional statistical delay constraint. As a secondary effect, such a delay constraint ensures that small backlogs which

may not endanger the backlog bound b_{\max} will eventually be cleared. Overall the system allocates the service to fulfill both of the following conditions:

- §1 the backlog at the end of the epoch is statistically bounded by b_{\max} , i.e., $\mathbb{P}[B(\tau + \Delta) \leq b_{\max}] \geq 1 - \varepsilon$
- §2 the backlog at the beginning of the scheduling epoch is cleared within a given delay bound $d = v\Delta$ with $v \geq 1$.

In a practical implementation of a cellular uplink transmission the base station possesses the required information, i.e., BSR and the received data amounts $D(t)$, to implement the above rules for uplink resource allocation. Using the backlog definition, the base station is able to infer arrivals within any epoch $A(\tau, \tau + \Delta)$ for all epoch starts τ using $B(\tau), B(\tau + \Delta)$ together with $D(\tau, \tau + \Delta)$ to enforce §2.

As the base station cannot know the exact arrivals a priori, we make use of the condition $\lambda\Delta \ll b_{\max}$ that permits neglecting the arrivals $A(\tau, \tau + \Delta)$ in (9) such that we can approximate the required service during Δ . In this case, the obtained bound for $B(\tau + \Delta)$ would comprise an error of roughly the ε -quantile A^ε of $A(\tau, \tau + \Delta)$. We denote this queue-aware scheduling without knowledge of the arrivals as “blind adaptation.” It shows how the lack of arrival information impacts the system performance. Given information on $A(\tau, \tau + \Delta)$, e.g., a bound on its distribution, or given A^ε , the adaptive system can compute a more precise estimate of the service required in the next scheduling epoch. Similar considerations are made in Sect. V-B.

Next, we consider an implementation of our frequent adaptation scheme (§1 and §2) in a baseline scenario of an LTE cellular system with 10 MHz channel bandwidth comprising 50 available resource blocks each of 180 kHz width and $\delta = 0.5$ ms length [1], [2]. We use the Rayleigh wireless channel model with average SNR of $1/\eta = 3$ dB. The base station receives BSRs $B(n\Delta)$ with $n \in \mathbb{N}$ and adapts β which is the bandwidth (amount of resource blocks) granted to the UE for the upcoming scheduling epoch $n + 1$. Using CQI, the base station has channel state information that permits estimating the SNR.

For a numerical evaluation, we consider $\Delta = 10$ slots and memoryless arrivals. We normalized the system parameters such that $E[c_i] = 1.33$ with $\beta = 1$ and average arrival rate of $\lambda = 0.65$. The backlog bound is $b_{\max} = 50$ and the delay bound for the combined algorithm is $d = 5\Delta$, both with violation probability $\varepsilon = 10^{-2}$. Fig. 5 shows backlog and delay CCDFs with a sole backlog constraint §1 compared to the backlog and delay constraint combination §1 and §2. The simulation length is 10^5 slots. Observe that due to “blind adaptation” the CCDF for the system using only §1 deviates at $\varepsilon = 10^{-2}$ by roughly the ε -quantile of $A(\tau, \tau + \Delta)$, i.e., $A^\varepsilon = 25$. Fig. 5(b) shows larger delays if only using §1 compared to the combination of §1 and §2. Adding a delay constraint substantially improves the performance. The additional constraint leads to increased resource grants as the base station complies with the tighter condition of §1 and §2.

Fig. 5(c) shows the resource savings of queue-aware scheduling given a fixed QoS constraint, i.e., b_{\max} with $\varepsilon = 10^{-2}$. First, we run a static version of the queue-aware scheduling system to find the amount of *fixed* resource blocks β that attains the QoS constraint, i.e. b_{\max} at ε (dashed line). We compare the static system to the adaptive one given the same QoS constraint, i.e., b_{\max} and ε . We plot the average amount of resource blocks granted (average β) for different b_{\max} (solid line). The adaptive system is efficient as it provides substantial resource savings (high utilizations) for a wide range of QoS constraints.

B. Infrequent Adaptation

In this section we regard large scheduling epochs Δ , in the sense that $\lambda\Delta$ is in the order of b_{\max} . Here, the amount of arrivals during the epoch Δ is non-negligible. Hence, we use bounds on the arrivals together with (6) to obtain a probabilistic bound on the backlog at the end of the epoch.

First, we use the formulation (5) together with an ε -effective service curve (6) that is violated with probability ε_s and some algebraic manipulations to express the backlog at the end of a scheduling epoch $B(\tau + \Delta)$ given the backlog at the beginning of the scheduling epoch $B(\tau)$ as

$$\mathbb{P} \left[B(\tau + \Delta) \leq \max \left[B(\tau) + A(\tau, \tau + \Delta) - \mathcal{S}(\Delta), \sup_{u \in [\tau, \tau + \Delta]} \{A(u, \tau + \Delta) - \mathcal{S}(\tau + \Delta - u)\} \right] \right] \geq 1 - \varepsilon_s. \quad (10)$$

Equipped with (10) we implement a queue-aware scheduling that regulates $\mathcal{S}(t)$ to ensure that

$$\mathbb{P}[B(\tau + \Delta) \leq b_{\max}] \geq 1 - \varepsilon_s. \quad (11)$$

Equation (10) establishes the following requirements on $\mathcal{S}(t)$ for the scheduling epoch:

$$\mathcal{S}(\Delta) \geq B(\tau) + A(\tau, \tau + \Delta) - b_{\max}, \quad \text{and} \quad (12)$$

$$\mathcal{S}(\tau + \Delta - u) \geq A(u, \tau + \Delta) - b_{\max}, \quad \forall u \in [\tau, \tau + \Delta]. \quad (13)$$

The adaptive system takes the following input: *i*) the queue size at the beginning of the scheduling epoch $B(\tau)$, *ii*) the

target backlog bound b_{\max} with violation probability ε_s , and *iii*) the arrivals between τ and $\tau + \Delta$. In the cellular scenario $B(\tau)$ is available through BSRs. The arrivals of the upcoming epoch are, however, not known a priori. Since in case of infrequent adaptation the arrivals cannot be neglected, we use upper envelope functions $E(t)$ as an estimate. These arrival envelopes can be either deterministic [26], i.e., $A(u, \tau + \Delta) \leq E(\tau + \Delta - u)$ for all $u \in [\tau, \tau + \Delta]$ or probabilistic of the form [20], [21], [29]

$$\mathbb{P} \left[\sup_{u \in [\tau, \tau + \Delta]} \{A(u, \tau + \Delta) - E(\tau + \Delta - u)\} > 0 \right] \leq \varepsilon \quad (14)$$

with a violation probability ε . Arrival envelopes can be constructed for a wide range of traffic models [20], [23], they can be computed from traffic traces, or they can be enforced, e.g., by a traffic shaper. We substitute the arrivals in (12), and (13) by the envelope $E(t)$ to obtain valid requirements on \mathcal{S} . In case we use a probabilistic bound on the arrivals as in (14) we can upper bound the violation probability in (10) by the sum of ε_s of the ε -effective service curve (6) and ε of (14).

In the following, we show the calculation for an LTE cellular system assuming a Rayleigh wireless channel model as given in Sect. IV. The formulation (7), which satisfies (4), has two parameters, the average SNR $1/\eta$ and the granted bandwidth β . We consider an adaptive system that manipulates the bandwidth grants β to retain the backlog bound (11). A direct extension based on adaptive power regulation through η is possible, but not considered here for reasons of space. For evaluation, we assume leaky bucket constrained arrivals with known envelope $E(t) = \sigma + \rho t$. Given b_{\max} and the epoch Δ we fix $\mathcal{S}(t) = \rho[t - \zeta]_+$ as a latency-rate function with latency term $\zeta = \frac{b_{\max} - \sigma}{\rho}$, where $[x]_+$ denotes $\max\{x, 0\}$. The latency-rate shape of $\mathcal{S}(t)$ is chosen in congruence with the shape of $E(t)$ such that the vertical deviation between both is constant and equal to b_{\max} . The rationale is that we are looking for the minimum resource allocation that retains the specified QoS bound. First, we start with the condition (13). We calculate (6) to find β for a given violation probability as

$$\begin{aligned} & \mathbb{P}[\exists u \in [\tau, \tau + \Delta] : \mathcal{S}(u, \tau + \Delta) < \mathcal{S}(\tau + \Delta - u)] \\ & \leq \sum_{u=\tau}^{\tau + \Delta - \zeta - 1} \mathbb{P}[\mathcal{S}(u, \tau + \Delta) < \mathcal{S}(\tau + \Delta - u)] \\ & \leq \sum_{u=0}^{\Delta - \zeta - 1} \inf_{\theta > 0} \{e^{\theta \mathcal{S}(\Delta - u)} \mathbb{M}_{\mathcal{S}}(-\theta, \Delta - u)\} \\ & \leq \sum_{x=\zeta+1}^{\Delta} \inf_{\theta > 0} \{e^{\theta \rho x} \mathbb{M}_{c_i}(-\theta)^x\} \\ & \leq \sum_{x=\zeta+1}^{\Delta} \inf_{\theta > 0} \{e^{(\theta \rho + \eta)x} \eta^{\theta \beta x} \Gamma(1 - \theta \beta, \eta)^x\} = \varepsilon'_s. \quad (15) \end{aligned}$$

Here, we followed the basic steps of the derivation of (6), while adapting the expressions to the latency-rate service curve shape. In the first step in (15) we applied Boole’s inequality and restricted the sum as $\mathcal{S}(\tau, t)$ is non-negative. In the second

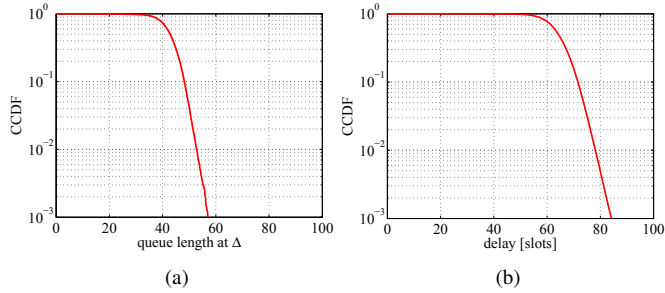


Fig. 6. Infrequent adaptation: The system retains the probabilistic backlog bound.

step we applied Chernoff’s lower bound. Using a variable transformation $x = \Delta - u$, the fact that $S(t)$ is a latency rate function, and the iid property of the service process we arrive at the third line. In the last line we inserted the Laplace transform of the service increments $M_{c_i}(-\theta)$ given in Sect. IV-B. We can prove that a solution of (15) exists, however, β cannot be expressed explicitly.

Next, we consider the condition on $S(\Delta)$ that follows from (12). We use an envelope formulation $E(t) = B(\tau) + \sigma + \rho t = \sigma'' + \rho t$ set $t = \tau + \Delta$ and calculate $P[S(\tau, \tau + \Delta) < S(\Delta)] \leq \varepsilon_p''$ similar to (8). Then, we insert the latency rate function $S(\Delta) = \rho[t - \zeta'']_+$ with $\zeta'' = \frac{b_{\max} - \sigma''}{\rho}$ and the Laplace transform $M_{c_i}(-\theta)$ from Sect. IV-B to relate β to ε_p'' . We obtain a bound on the violation probability ε_s of the backlog bound in (11) as the sum of ε_p'' from above and ε_s' from (15), i.e., using the combination of the requirements (12) and (13).

In the following we present simulation results for queue-aware scheduling with infrequent adaptation in an LTE scenario as depicted in Fig. 1. The baseline scenario remains unchanged with respect to Sect. V-A except for $\Delta = 100$ slots and $b_{\max} = 65$, i.e., $\lambda\Delta = b_{\max}$ where $\lambda = 0.65$ as before and the violation probability $\varepsilon_s = 10^{-2}$. An arrival envelope with parameters $\sigma = 10$ and $\rho = 0.66$ is enforced on Poisson traffic with mean rate λ . We apply a numerical binary search to find β that satisfies (15) for a given ε_s .

Fig. 6(a) shows the adaptive system successfully providing the configured probabilistic bound on the backlog at the end of the scheduling epoch. We observe in Fig. 6(b) a base level of delays, here around 50 slots, after which the CCDF shows a sharp bend. The intuition behind this is that the adaptation algorithm saves resources by leaving a residual amount of backlog not cleared if it does not threaten to violate the QoS constraint. Observe that in Fig. 6(b) the delay variation (jitter) is small with respect to the base level of delays.

The decision whether to use infrequent or frequent adaptation strongly depends on the length of the scheduling epoch Δ and the relation of b_{\max} to the amount of traffic which is expected in Δ . Given base stations that do not have any information on the arrivals at the UE (except for the average rate) the choice would be frequent adaptation. Given more information on the arrivals, e.g., a probabilistic/deterministic bound for the time span Δ , the base station can deploy the

more refined algorithm of infrequent adaptation over longer scheduling epochs, which reduces signalling and can save computational resources at the base station.

C. Multi-user Scheduling

We conclude this section with a concise evaluation of queue-aware scheduling for a system serving multiple users with overall resource constraints. We utilize the infrequent adaptation algorithm with unchanged parameters as above. For ease of exposition, we consider M homogeneous and statistically independent UEs in a cell, each signalling BSRs to the base station. The heterogeneous case follows at the expense of additional notation. The base station deploys the adaptive system to calculate the amount of resource blocks β_j , for $j \in [1, M]$, to assign to the j th UE in the current scheduling epoch. Consider that the base station has a finite overall amount of available resource blocks β_s to distribute in an epoch. Hence, the base station may deploy one of the following three scheduling algorithms on top of the queue-aware scheduling, i.e., *i*) deterministic (FDMA), *ii*) priority, and *iii*) proportional fair scheduling. The deterministic scheduler *i*) divides the available resources β_s equally over M users, i.e., user j receives $\hat{\beta}_j = \min\{\beta_j, \beta_s/M\}$. In case of the priority scheduler *ii*) we regard M ordered priority classes each with one user, where the user in class j receives $\hat{\beta}_j = \min\{\beta_j, \beta_s - \sum_{k=1}^{j-1} \hat{\beta}_k\}$ resources. In the case of proportional fair scheduling *iii*) we employed the same resource distribution as for priority scheduling, however, we reordered the priority list at the beginning of every scheduling epoch based on a score that is calculated for each user j similar to the definition in [30]: For the j th user the score is given as $S_j(\tau, \tau + \Delta)/(D_j(\tau)/\tau)$, i.e., the amount of service that user j expects in the scheduling epoch divided by the average transmission rate of the user up to the beginning of the scheduling epoch τ .

We consider a simulation of the multiuser system with the following parameters: $b_{\max} = 65$, $\varepsilon = 10^{-2}$, $\Delta = 100$ slots, $M = 10$ users, and a simulation length of 10^5 slots. Fig. 7 shows the performance of the multi-user system under different utilizations. For the priority scheduler the CCDF of the first priority user remains unchanged through all considered utilizations. Observe that for very high utilization the priority scheduler starves low priority classes to provide high priority classes with enough resources to attain the QoS constraint. In case of proportional fair scheduling and deterministic scheduling the resources are “fairly” distributed such that either none or all UEs are provided with the QoS constraint. The backlog CCDFs for all UEs are identical such that we display only one for the proportional fair case and one for the deterministic case. An interesting observation is that the CCDF of the backlog for a single user scenario without the overall resource constraint β_s as displayed in Fig. 6(a) matches the CCDF of the priority user #1 in Fig. 7. The adaptive system shows strong performance providing the QoS constraint to all UEs while running at utilizations of up to 0.9. The deterministic scheduler behaves similarly to the single

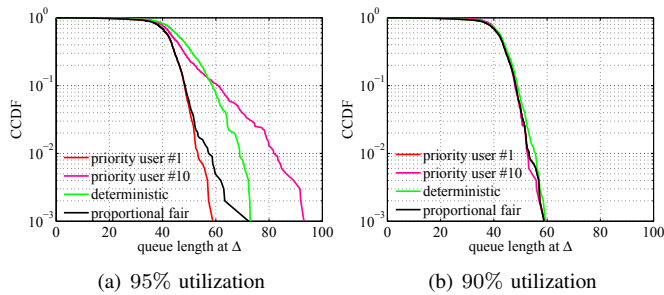


Fig. 7. Multi-user scenario: Backlogs in the adaptive system under different scheduling algorithms. Notable difference only at very high utilizations.

user case in Sect. V-B as the users' uplinks can be regarded as parallel independent systems. Yet, it relates through the condition on $\hat{\beta}_j$ to the study of fixed service rate constraints in Sect. III. For the priority scheduler the system benefits from statistical multiplexing effects when distributing the overall available resources β_s . In case of proportional fair scheduling β_s is evenly distributed such that either none or all UEs are provided with the QoS constraint.

VI. CONCLUSIONS

In this work, we presented an adaptive resource allocation scheme that provides probabilistic quality of service guarantees based on transmit buffer occupation. Adaptive resource allocation enables the optimization of the resource utilization in communication networks under dynamic conditions. First, we used exact formulae for the class of Poisson traffic to show substantial resource savings under certain conditions compared to static resource allocations. We also showed the robustness of the adaptive system with respect to misadaptation and resource limitation. Motivated by the exact results we provided a general framework for implementing queue-aware scheduling that takes as input general traffic arrival and service processes. We considered a wireless channel model and described two algorithms for adaptive resource allocation. Using the example of a cellular network we presented simulation results that show the performance gain with queue-aware scheduling. The adaptive system saves resources, while retaining a given QoS level. We showed a brief example of the performance of the adaptive system in multi-user scenarios together with insight and recommendations for the operation of queue-aware scheduling.

REFERENCES

- [1] C. Cox, *An Introduction to LTE: LTE, LTE-Advanced, SAE and 4G Mobile Communications*. Wiley, 2012.
- [2] 3GPP specification TS 36.321, "Evolved Universal Terrestrial Radio Access (E-UTRA); Medium Access Control (MAC) protocol specification," Mar. 2012, release 8, version 8.12.
- [3] J. Huang and Z. Niu, "Buffer-Aware and Traffic-Dependent Packet Scheduling in Wireless OFDM Networks," in *Proc. of IEEE WCNC*, Mar. 2007, pp. 1554–1558.
- [4] J. M. George and J. M. Harrison, "Dynamic control of a queue with adjustable service rate," *Oper. Res.*, vol. 49, no. 5, pp. 720–731, Sep. 2001.
- [5] K. Adusumilli and J. Hasenbein, "Dynamic admission and service rate control of a queue," *Queueing Systems*, vol. 66, no. 2, pp. 131–154, 2010.

- [6] A. Wierman, L. Andrew, and A. Tang, "Stochastic analysis of power-aware scheduling," in *Proc. of Allerton Conference on Communication, Control, and Computing*, Sep. 2008, pp. 1278–1283.
- [7] L. L. Andrew, M. Lin, and A. Wierman, "Optimality, fairness, and robustness in speed scaling designs," *SIGMETRICS Perform. Eval. Rev.*, vol. 38, no. 1, pp. 37–48, Jun. 2010.
- [8] C.-p. Li and M. J. Neely, "Delay and rate-optimal control in a multi-class priority queue with adjustable service rates," in *Proc. of IEEE INFOCOM*, 2012, pp. 2976–2980.
- [9] S. R. Mahabhashyam and N. Gautam, "On queues with markov modulated service rates," *Queueing Syst. Theory Appl.*, vol. 51, no. 1-2, pp. 89–113, Oct. 2005.
- [10] A. Bianco, M. Casu, P. Giaccone, and M. Ricca, "Joint delay and power control in single-server queueing systems," in *Proc. of IEEE GreenCom*, Oct 2013, pp. 50–55.
- [11] I. Bettesh and S. Shamaï, "Optimal power and rate control for minimal average delay: The single-user case," *IEEE Trans. Inform. Theory*, vol. 52, no. 9, pp. 4115–4141, Sep. 2006.
- [12] E. Yeh and A. Cohen, "Throughput and delay optimal resource allocation in multiaccess fading channels," in *Proc. of IEEE International Symposium on Information Theory*, Jun. 2003, pp. 245–245.
- [13] B. E. Collins and R. L. Cruz, "Transmission policies for time varying channels with average delay constraints," in *Proc. of Allerton Conference on Communication, Control, and Computing*, 1999, pp. 709–717.
- [14] R. A. Berry and R. G. Gallager, "Communication over fading channels with delay constraints," *IEEE Trans. Inform. Theory*, vol. 48, no. 5, pp. 1135–1149, 2002.
- [15] D. Niyato and E. Hossain, "Queue-aware uplink bandwidth allocation and rate control for polling service in IEEE 802.16 broadband wireless networks," *IEEE Trans. Mobile Computing*, vol. 5, no. 6, pp. 668–679, Jun. 2006.
- [16] M. Mehta, S. Khakurel, and A. Karandikar, "Buffer-based channel dependent UpLink scheduling in relay-assisted LTE networks," in *Proc. of IEEE WCNC*, Apr. 2012, pp. 1777–1781.
- [17] L. Kleinrock, *Queueing Systems, Volume 1: Theory*. Wiley & Sons, 1975.
- [18] J. Abate and W. Whitt, "Calculating time-dependent performance measures for the M/M/1 queue," *IEEE Trans. Communications*, vol. 37, no. 10, pp. 1102–1104, 1989.
- [19] H. Al-Zubaidy, J. Liebeherr, and A. Burchard, "Network-layer performance analysis of multihop fading channels," *IEEE/ACM Trans. Networking*, vol. PP, no. 99, Oct. 2014.
- [20] F. Ciucu, A. Burchard, and J. Liebeherr, "Scaling properties of statistical end-to-end bounds in the network calculus," *IEEE/ACM Trans. Networking*, vol. 14, no. 6, pp. 2300–2312, Jun. 2006.
- [21] R. L. Cruz, "Quality of service management in Integrated Services networks," in *Proc. of Semi-Annual Research Review, Center of Wireless Communication, UCSD*, Jun. 1996.
- [22] A. Burchard, J. Liebeherr, and S. Patek, "A min-plus calculus for end-to-end statistical service guarantees," *IEEE Trans. Inform. Theory*, vol. 52, no. 9, pp. 4105–4114, Aug. 2006.
- [23] M. Fidler, "A survey of deterministic and stochastic service curve models in the network calculus," *IEEE Communications Surveys and Tutorials*, vol. 12, no. 1, pp. 59–86, 2010.
- [24] M. Fidler and A. Rizk, "A guide to the stochastic network calculus," in *Proceedings of the 7th GIITG-Workshop MMBnet*, Sep. 2013, pp. 1–11.
- [25] C.-S. Chang, *Performance Guarantees in Communication Networks*. Springer-Verlag, 2000.
- [26] J.-Y. Le Boudec and P. Thiran, *Network Calculus A Theory of Deterministic Queueing Systems for the Internet*, ser. LNCS. Springer-Verlag, 2001, no. 2050.
- [27] R. Lübben, M. Fidler, and J. Liebeherr, "Stochastic bandwidth estimation in networks with random service," *IEEE/ACM Trans. Networking*, vol. 22, no. 2, pp. 484–497, Apr. 2014.
- [28] M. Fidler, R. Lübben, and N. Becker, "Capacity-Delay-Error-Boundaries: A Composable Model of Sources and Systems," *IEEE Trans. Wireless Communications*, vol. 14, no. 3, pp. 1280–1294, Mar. 2015.
- [29] O. Yaron and M. Sidi, "Performance and stability of communication networks via robust exponential bounds," *IEEE/ACM Trans. Networking*, vol. 1, no. 3, pp. 372–385, Jun. 1993.
- [30] F. P. Kelly, A. K. Maulloo, and D. K. Tan, "Rate control for communication networks: shadow prices, proportional fairness and stability," *Journal of the Operational Research society*, pp. 237–252, 1998.